

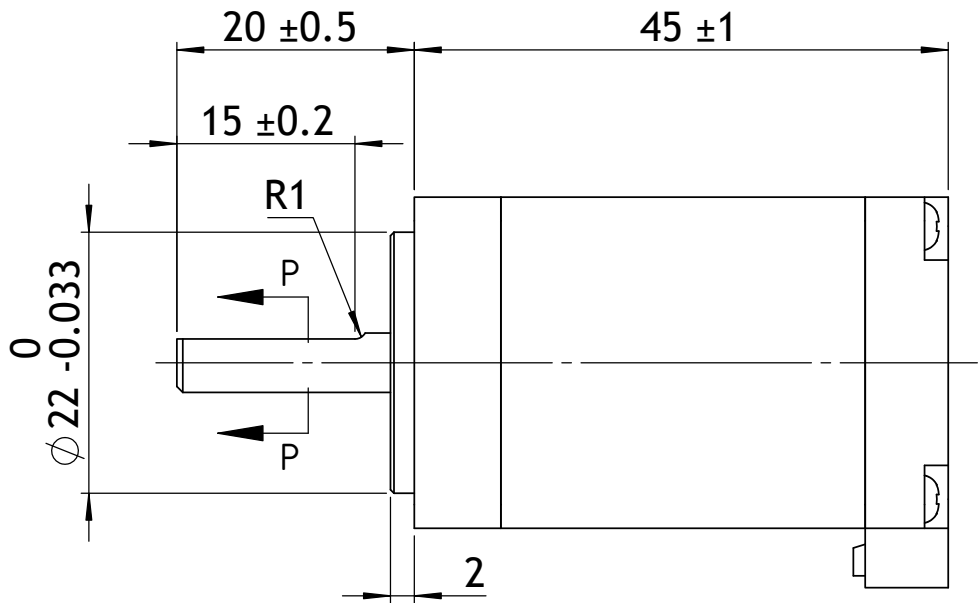
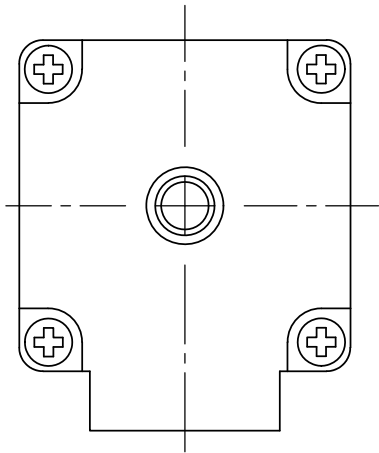


变更履历


版本	日期	设计	内容
A	2023/3/31	AC	初始版本
B			
C			

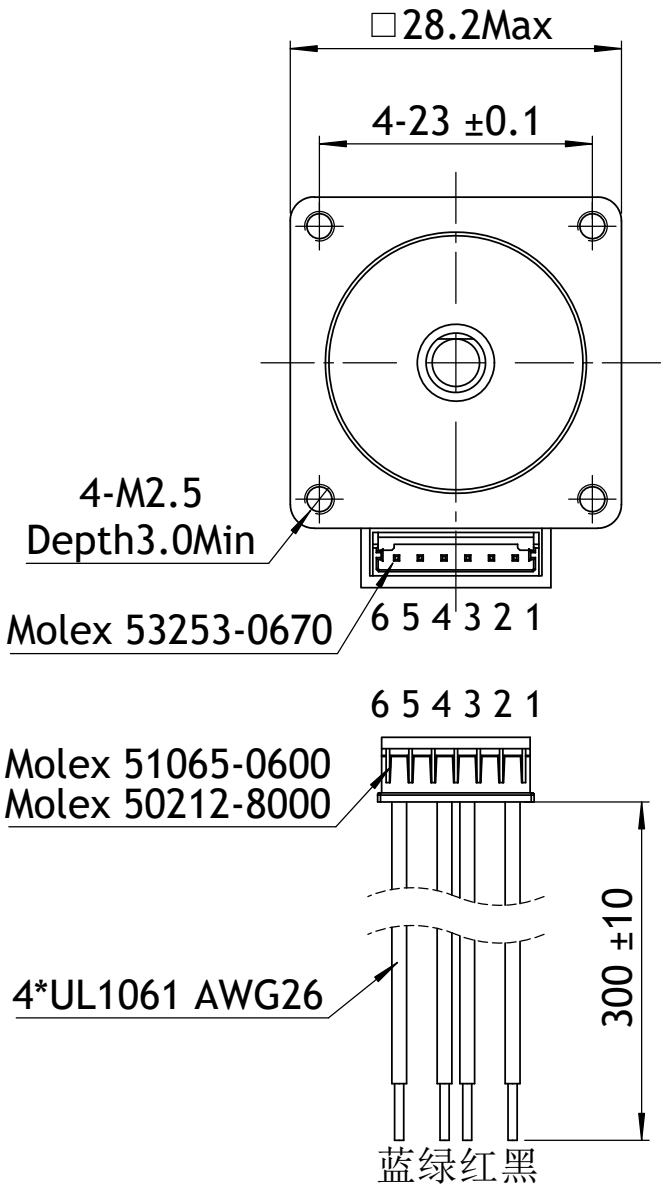

视图P-P

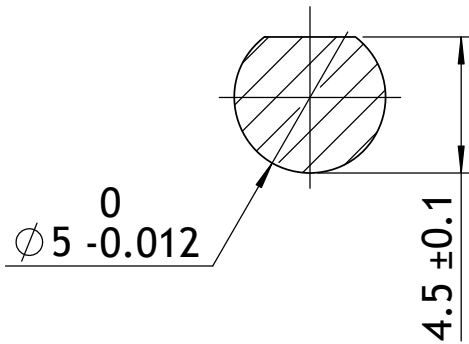

电机相数	2
步距角	1.8°
额定相电流	1.0A
额定电压	2.4VDC
相电阻	2.4Ω±10%
电感相	3.1mH±20%
保持力矩	0.11Nm
绝缘等级	B
绝缘电阻	100MΩ(500VCD)
温升	80℃
重量	170g

客户		励磁顺序							尺寸单位为“mm”,未标注公差按以下标准: 未注明线型性公差与角度尺寸公差参照; DIN ISO 2768-1:m 未注明形状与位置尺寸公差参照; DIN ISO 2768-2:k			无锡东旭机电有限公司			
电气原理图 Wiring Diagram 1 黑 A+ 4 绿 A- 3 红 B+ 6 蓝 B- 		CW ↓	STEP	A+	B+	A-	B-	↑ CCW				设计	AC	审核	ZDX
			1	+	+	-	-		比例	1.5:1	第一角画法 	型号	28H245T10-20DN-S	REV.A	
			2	-	+	+	-								
			3	-	-	+	+								
			4	+	-	-	+								