

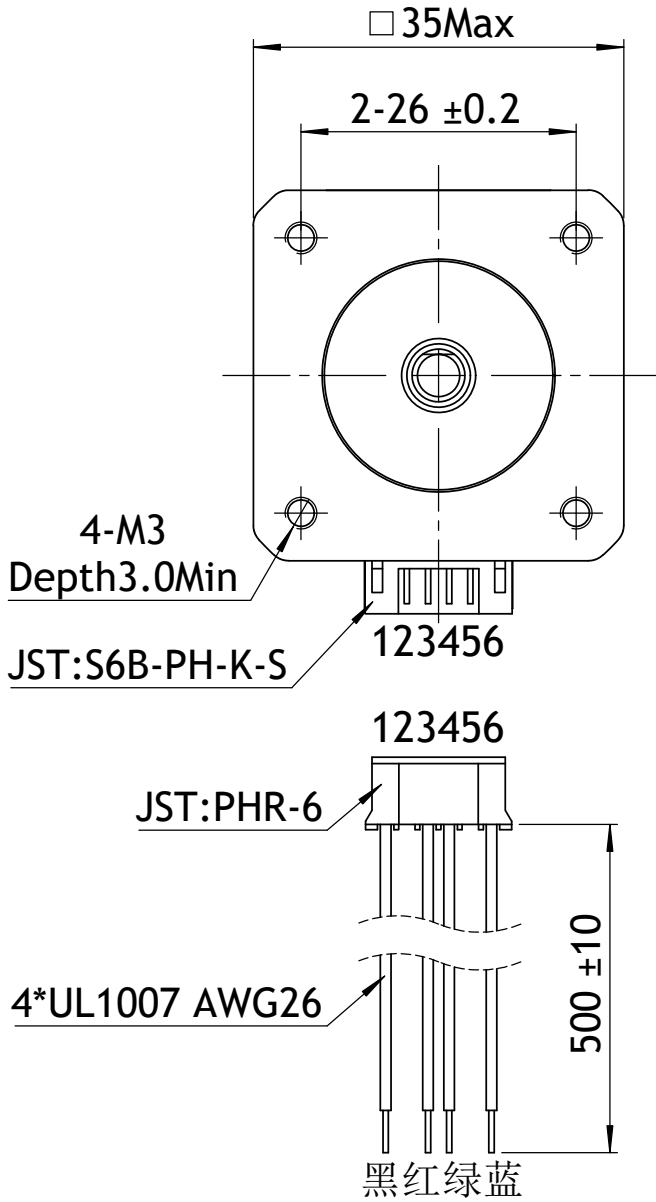
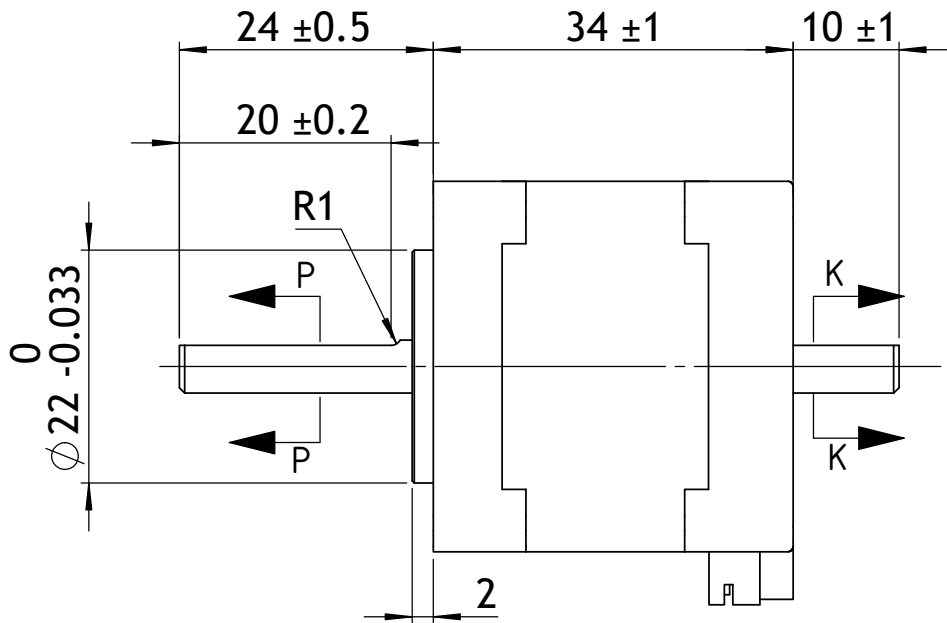


变更履历


版本	日期	设计	内容
A	2023/3/31	AC	初始版本
B			
C			

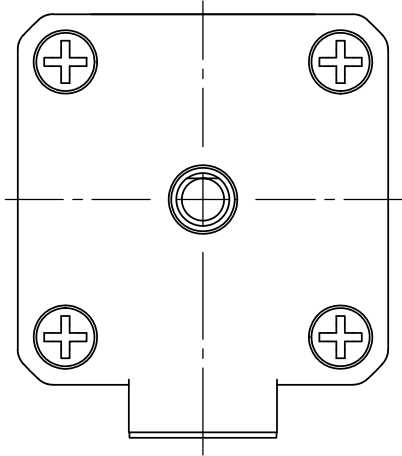


视图 P-P

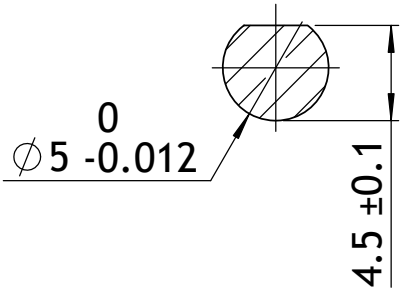

视图K-K

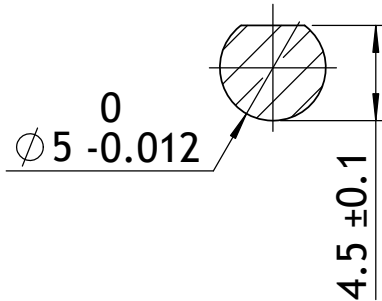

电机相数	2
步距角	1.8°
额定相电流	1.5A
额定电压	1.4VDC
相电阻	0.9Ω±10%
电感相	1.2mH±20%
保持力矩	0.15Nm
绝缘等级	B
绝缘电阻	100MΩ(500VCD)
温升	80℃
重量	180g

客户		励磁顺序							尺寸单位为“mm”,未标注公差按以下标准: 未注明线型性公差与角度尺寸公差参照; DIN ISO 2768-1:m 未注明形状与位置尺寸公差参照; DIN ISO 2768-2:k				无锡东旭机电有限公司				
电气原理图 Wiring Diagram		1 黑 A+ 4 绿 A- 3 红 B+ 6 蓝 B- 		CW ↓	STEP	A+	B+	A-					B-	↑ CCW	设计	AC	审核
					1	+	+	-	-	比例	1.4:1	第一角画法			型号	35H234T15-24DX-S	REV.A
					2	-	+	+	-								
					3	-	-	+	+								
			4	+	-	-	+										